



R-AVR1808

Automatic voltage regulator with surge protection


IDEAL PROTECTION FOR



LED / LCD screens, Computer, Audio / Video, Entertainment, Video game console and more...

R-AVR1808

Automatic voltage regulator with surge protection

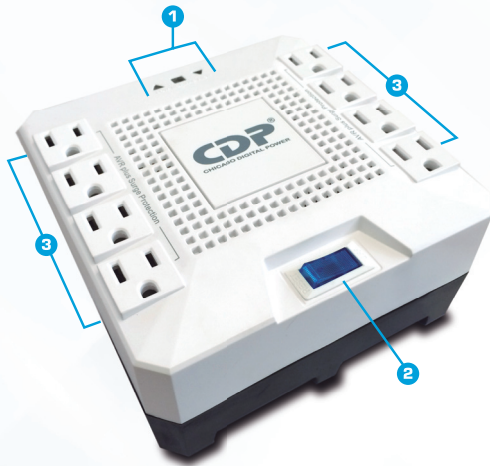

This voltage regulator series corrects high and low voltages that cause damages to your PC's and other AC accessories. It has a complete design with a high performance surge suppressor that absorbs high voltages and spikes.

With incorporated components it filters harmonic noises that damage the logic circuits on computers, as well as a surge protection for the telephone line and DSL that gathers a full and ideal protection to your investment.

1. Buck/Boost and normal mode LED's.
2. ON switch and overload breaker.
3. 8 overload and AVR protection.
4. Fax, modem and DSL protection.

MODEL		R-AVR 1808
Capacity		1800 VA/1000W
Input	Voltage	120 Vac
	Frequency	50/60 Hz (auto sensing)
	Voltage range	90 Vac-144 Vac
	Fase	1 Fase 3 Hilos
Output	Voltage	108Vac- 132Vac
	Frequency	50 Hz - 60 Hz
	Number and type of outputs	8 Nema 5-15R (4+4)
Protection	Overload	Manual reset switch
	Shorted	Manual reset switch
	Data line protection	RJ-45/11
	Lightning Overload Protection(Joules)	175
LED	Normal operation	Green
	High voltage indicator	Yellow
	Low voltage indicator	Yellow
Physical	Dimension (Length x Height x Depth)	160 x 84 x 166 mm
	Weight (Kg)	2.56
Environment	Temperature	0 - 40 °C
	Acoustic noise	< 40 dB @ 1 m
Certifications		ISO 9001, ISO 14001, CIDET y NOM

"Specifications subject to change without notice"



Scan and know our products

Bolivia: 800-100156 **Colombia:** 01800-5181617 **Costa Rica:** 800-435237 **El Salvador:** 800-6773 **Honduras:** 1800-25616099
México: 001800 514 8611 **Panamá:** 011-00800-2268611 **Perú:** 0800-54674 **República Dominicana:** 1888-7514876 **Venezuela:** 0800-1627485