


# DH-HAP100 Fast guide




**The microphone input voltage range is 9-15V DC and the current is 50-100mA**



**The microphone has the female power connector to which the male connector must be connected.**

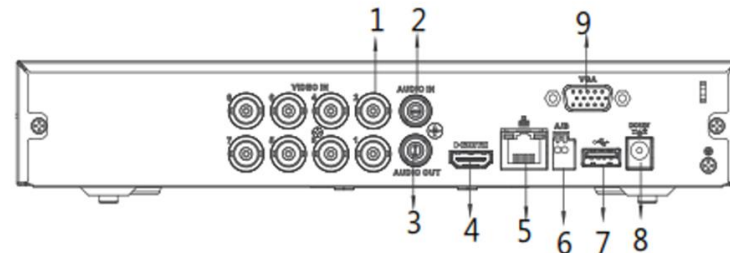

- |                            |                      |
|----------------------------|----------------------|
| 1 VIDEO IN                 | 6 RS485 Interface    |
| 2 AUDIO IN, RCA Connector  | 7 USB Interface      |
| 3 AUDIO OUT, RCA Connector | 8 DC 12V Power Input |
| 4 HDMI Interface           | 9 VGA Interface      |
| 5 Network Interface        |                      |

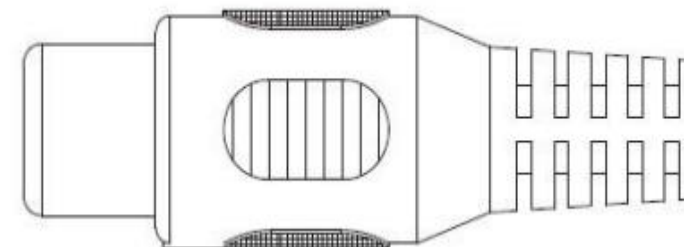

**Can be connected via RCA connector to a camera (harness connector) or to a recorder (rear panel connector, illustrative panel image)**