




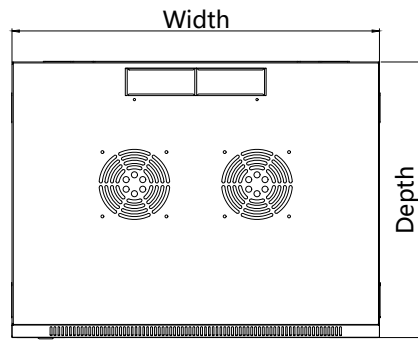

TOP

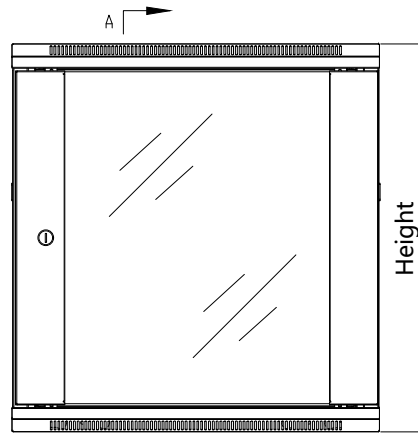


FRONT

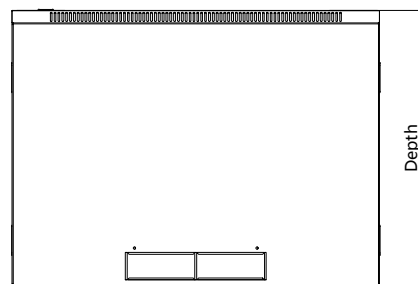


BOTTOM

Model No.	Capacity(U)	Width (mm)	Depth (mm)	Height (mm)
SA6609	9	600	600	502

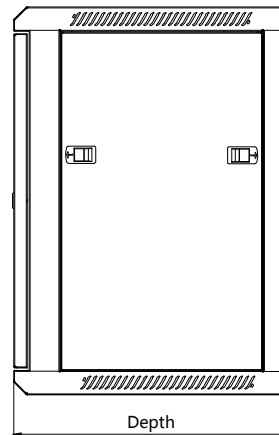

SIDE

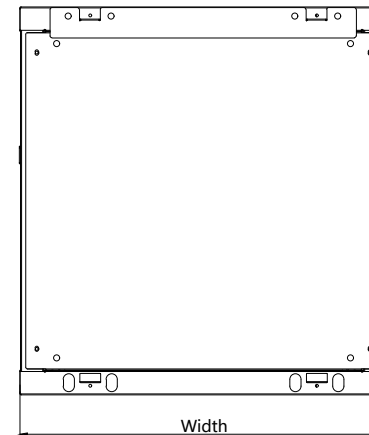

BACK

Standard:

Comply with ANSI/EIA
RS-310-D、IEC297-2、DIN41494;PART1 ;
DIN41494;PART7 ;

Material:

SPCC Cold Rolled Steel ;
19" rails : 1.5mm, side panel : 1.2mm ,
others: 1.0mm

Loading capacity:

Static loading;60KG

Feature:

- **Completely transparent toughened front door, quick open the side panel and rear panel, convenient and flexible**
- The overall welding structure, firm structure, static load bearing of up to 60 kg,
- The top and bottom can be closed knock off type 2 place walk line channel
- Before and after the Angle gauge can move
- Backplane removable, can be completely opened on the back